

标准型， 压力变送器

Electronic
Pressure Transmitter


SDP6400系列

应用于工程机械、船舶、机床、
自动化控制等领域

- 优异的EMC性能
- 通过盐雾、温湿度测试
- 防护等级IP65/IP67
- 符合RoHS,CE认证



外形尺寸图 Dimensions

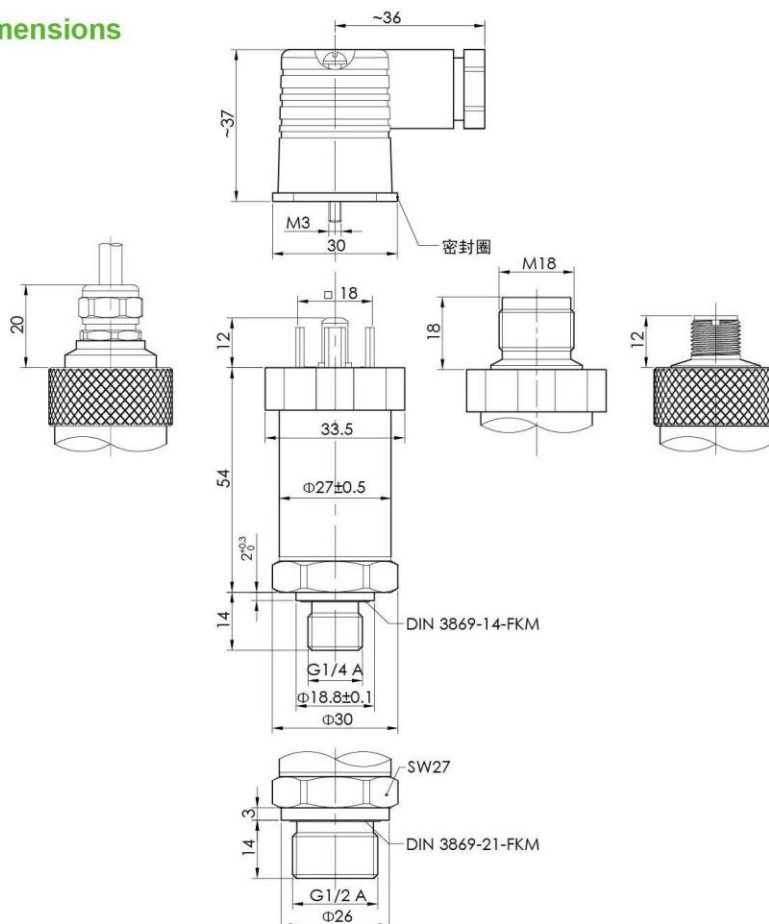

64-系列 压力变送器

技术参数 Technical Parameter

参数	Specifications	技术指标	Technical Data
输入数据 Input data			
压力范围	Measuring ranges	0~1...2...5...8...16...30...50...100...400...500...600...800...1000Bar	
过载压力	Overload pressures	200%F.S	150%F.S 150%F.S
破坏压力	Burst pressures	500%F.S	300%F.S 200%F.S
机械接口	Mechanical connection	G1/4-A	G1/2-A
锁紧扭力	Torque value	20 N.m	45N.m
与介质接触部分	Parts in contact with medium	Mech. connection: Stainless steel Seal: FKM	
输出数据 Output data			
输出信号及阻抗	Output signal, permitted resistance	4 .. 20 mA, 2 conductor $R_{Lmax.} = (U_B - 10 \text{ V}) / 20 \text{ mA} [\text{k}\Omega]$ 0 .. 10 V, 3 conductor $R_{Lmin.} = 2 \text{ k}\Omega$ 0 .. 5 V, 3 conductor $R_{Lmin.} = 2 \text{ k}\Omega$	
精度为DIN 16086	Accuracy to DIN 16086 Max. setting	$\leq \pm 0.25\% \text{ F.S typ.}$ $\leq \pm 0.3 \% \text{ F.S max.}$	
非线性	Non-linearity at max. setting to DIN 16086	$\leq \pm 0.3 \% \text{ F.S max.}$	
迟滞	Hysteresis	$\leq \pm 0.1 \% \text{ F.S max.}$	
重复精度	Repeatability	$\leq \pm 0.05 \% \text{ F.S}$	
压力上升时间	Rise time	$\leq 1 \text{ ms}$	
长期稳定性	Long-term drift	$\leq \pm 0.1 \% \text{ FS typ. / year}$	
环境条件 Environmental conditions			
温度补偿范围	Compensated temperature range	-25~ +85 °C	
工作温度范围	Operating temperature range	-35~ +100 °C	
储存温度范围	Storage temperature range	-40~ +135 °C	
流体温度范围	Fluid temperature range	-35~ +100 °C	
CE 标记	CE mark	EN 61000-6-1 / 2 / 3 / 4	
耐振性	Vibration resistance to DIN EN 60068-2-6 at 10 .. 500 Hz	$\leq 20 \text{ g}$	
防护等级	Protection class to DIN 40050	IP 65 (3pole+PE,DIN 43650 male and Binder 714 M18) IP 67 (M12x1 4-pole, male) IP 68 (connector is used)	
其他数据 Other data			
工作方式	Operational Mode	绝压, 表压 Absolute,Gague	
2线制电源电压	Supply voltage 2 conductor	24VDC(12..32VDC)	
3线制电源电压	Supply voltage 3 conductor	24VDC(12..32VDC)	
电压电流残余脉冲	Residual ripple of supply voltage	$\leq 5 \%$	
消耗电流3线制	Current consumption 3 conductor	approx. 25 mA	

选型表 Model code:

SDP 6 4 X X -X-XXXX-X (000)

机械连接 Mechanical connection

- 4 = G1/4- A DIN 3852 (male)
- 5 = G1/2- A DIN 3852 (male)
- M = 客户定制

电气连接 Electrical connection

- 4 = 4 pole Binder series 714 M18, male
(connector not supplied)
- 5 = 3 pole + PE, DIN 43650, male
(connector supplied)
- 6 = M12x1 4-pole, male
(connector not supplied)
- 0 = flying lead (Teflon cable silicone-free)

输出信号 Signal

- A = 4 ~ 20 mA, 2 conductor
- B = 0 ~ 10 V , 3 conductor
- J = 0 ~ 5 V , 3 conductor

压力范围(Bar) Pressure ranges in Bar

- 0001 = 0~1Bar
- 0016 = 0~16Bar
- 1000 = 0~1000Bar
- (压力范围0~1... 1000Bar可选)

工作方式 Operational Mode


- A = 绝压 Absolute
- G = 表压 Gague

导线 Modification number

- 000 = 标准 (无电缆线)
- 020 = 2m 电缆线 (对应电器连接选项母端电缆线)
- 050 = 5m 电缆线 (对应电器连接选项母端电缆线)


接线定义 Pin connections:

Binder series 714 M18




Pin	SDP64X4-A	SDP64X4-B/J
1	n.c.	+24VDC
2	+24VDC	Signal
3	Signal+	0 V
4	n.c.	n.c.

DIN 43650




Pin	SDP64X5-A	SDP64X5-B/J
1	+24VDC	+24VDC
2	Signal+	0 V
3	n.c.	Signal
⏚	PE	PE

M12x1 4-pole male



Pin	SDP64X6-A	SDP64X6-B/J
1	+24VDC	+24VDC
2	Signal+	Signal
3	n.c.	0 V
4	n.c.	n.c.

Flying lead



Cable assignment

Core	SDP64X0-A	SDP64X0-B/J
red	+24VDC	+24VDC
yellow	Signal+	Signal
green	n.c.	0 V
white	n.c.	n.c.
silver mesh	shielding wire	shielding wire